


E30 LNG



Highlights

- _ Cold LNG or saturated LNG
- _ High flow rate up to 100Kg/min.
- _ Metrology requirements: MID
- _ No additional metrological tests
- _ Safety requirements: ATEX
- _ POS communication: IFSF-LON
- _ PLC communication: MODBUS
- _ Remote monitoring system (optional): SMART DISPENSER

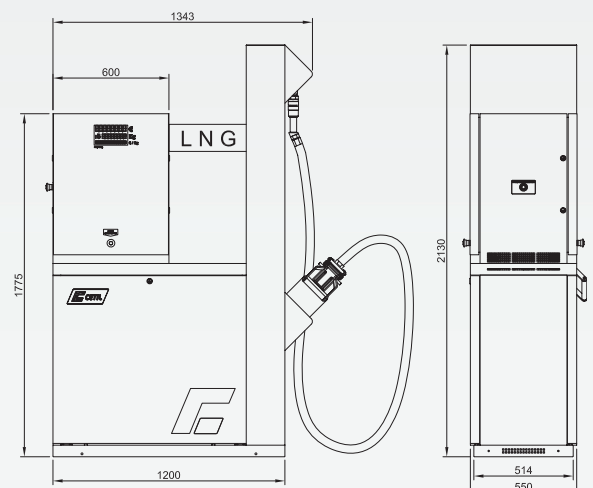

E30 LNG

Electronics

EAS2 Electronic Calculator

- High contrast, wide viewing angle LCD.
- Indication: mass, price, and unit price.
- Own design and manufacturing.
- More than 1000 units installed.
- Informative messages with moving text line.
- Storage of last:
 - 150 deliveries
 - 250 errors
- Easy maintenance thanks to its modular design.
- Electronic totalizer: mass and No. of deliveries.
- Start-stop button or deadman button.
- Optical indicator of delivery status.

Hydraulics

- High accuracy coriolis meter for LNG and BOG.
- Flexible LNG and BOG hoses with break aways.
- Relief valves connected to venting line.
- Filling hose pressure gauge.
- Stainless steel piping and fittings.
- Grounding clamp.
- Compressed air gun.



Dispensing Ecotechnology

Cetil Dispensing Technology, S.L.
Pelaya, 37 (P.I. Río de Janeiro) - 28110 Algete (Madrid) Spain
Phone: (+34) 916 287 651
Fax: (+34) 916 287 653
cetil@cetil.com | www.cetil.com

