


E12 Fuelling unit



Highlights

- _ Own consumption
- _ High contrast LCD volume indicator
- _ Optional RFID card reader
- _ Easily integrable communications protocol
- _ Delivery management application
- _ Single or three-phase electric motor

E12 Fuelling unit

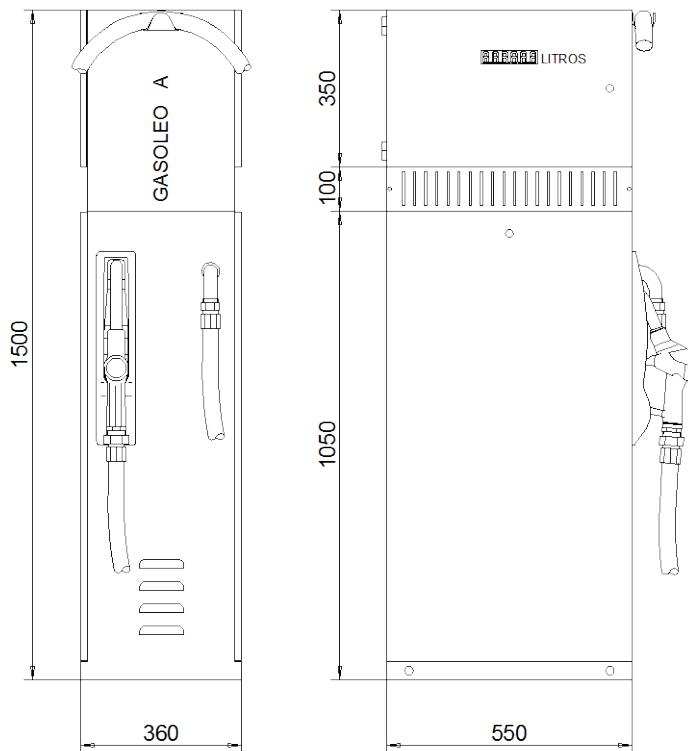

E12 Fuelling unit characteristics

Standard

- 1 hose
- Monobloc hydraulic group
- Three-phase electric motor
- Electronic volume totaliser

Optional

- RFID card reader
- Delivery management application
- Single-phase electric motor



Cetil Dispensing Technology, S.L.
C/ Pelaya, 37 (P.I. Rio de Janeiro)
28110 Algete (Madrid) Spain
Tel: (+34) 916 287 651
Fax: (+34) 916 287 653
cefil@cefil.com | www.cefil.com